

COREtec®

FLOORS

# PRO-PLUS

Where style meets strength



EN

FI - SE - NO - DA

## Why **choose** a COREtec<sup>®</sup> floor?



### 1 Warm feeling thanks to our cork backing

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors.

And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.

### 2 Easy to maintain

Cleaning our floors is child's play. Thanks to our high performance wear layers, COREtec<sup>®</sup> floors are easy to clean and easy to maintain.

Spilled something? No worries, you can easily clean it up, using your floor cleaner or our recommended Coretec<sup>®</sup> Cleaning Kit.



### 3 100% waterproof floors

Our floors are 100% waterproof, kid proof & pet proof. Try them in your kitchen or bathroom: they won't warp or buckle, even if submerged in water.

Our 100% waterproof core, resilient vinyl and protective wear layer will keep your floor looking good for the life of your home. So naturally, all COREtec<sup>®</sup> floors come with a limited lifetime residential warranty.

### 4 Time saving solution


COREtec<sup>®</sup> is easy to install, to care for and to live with. Its secure angle tap system doesn't require any glue or nails and can be installed over existing floors without additional underlayment.

Forget about sanding, polishing, sealing or refinishing: our floors are maintenance-free.



PRO CORE® - 5 mm

# The original **100% waterproof floor**, with extra dent & impact resistance

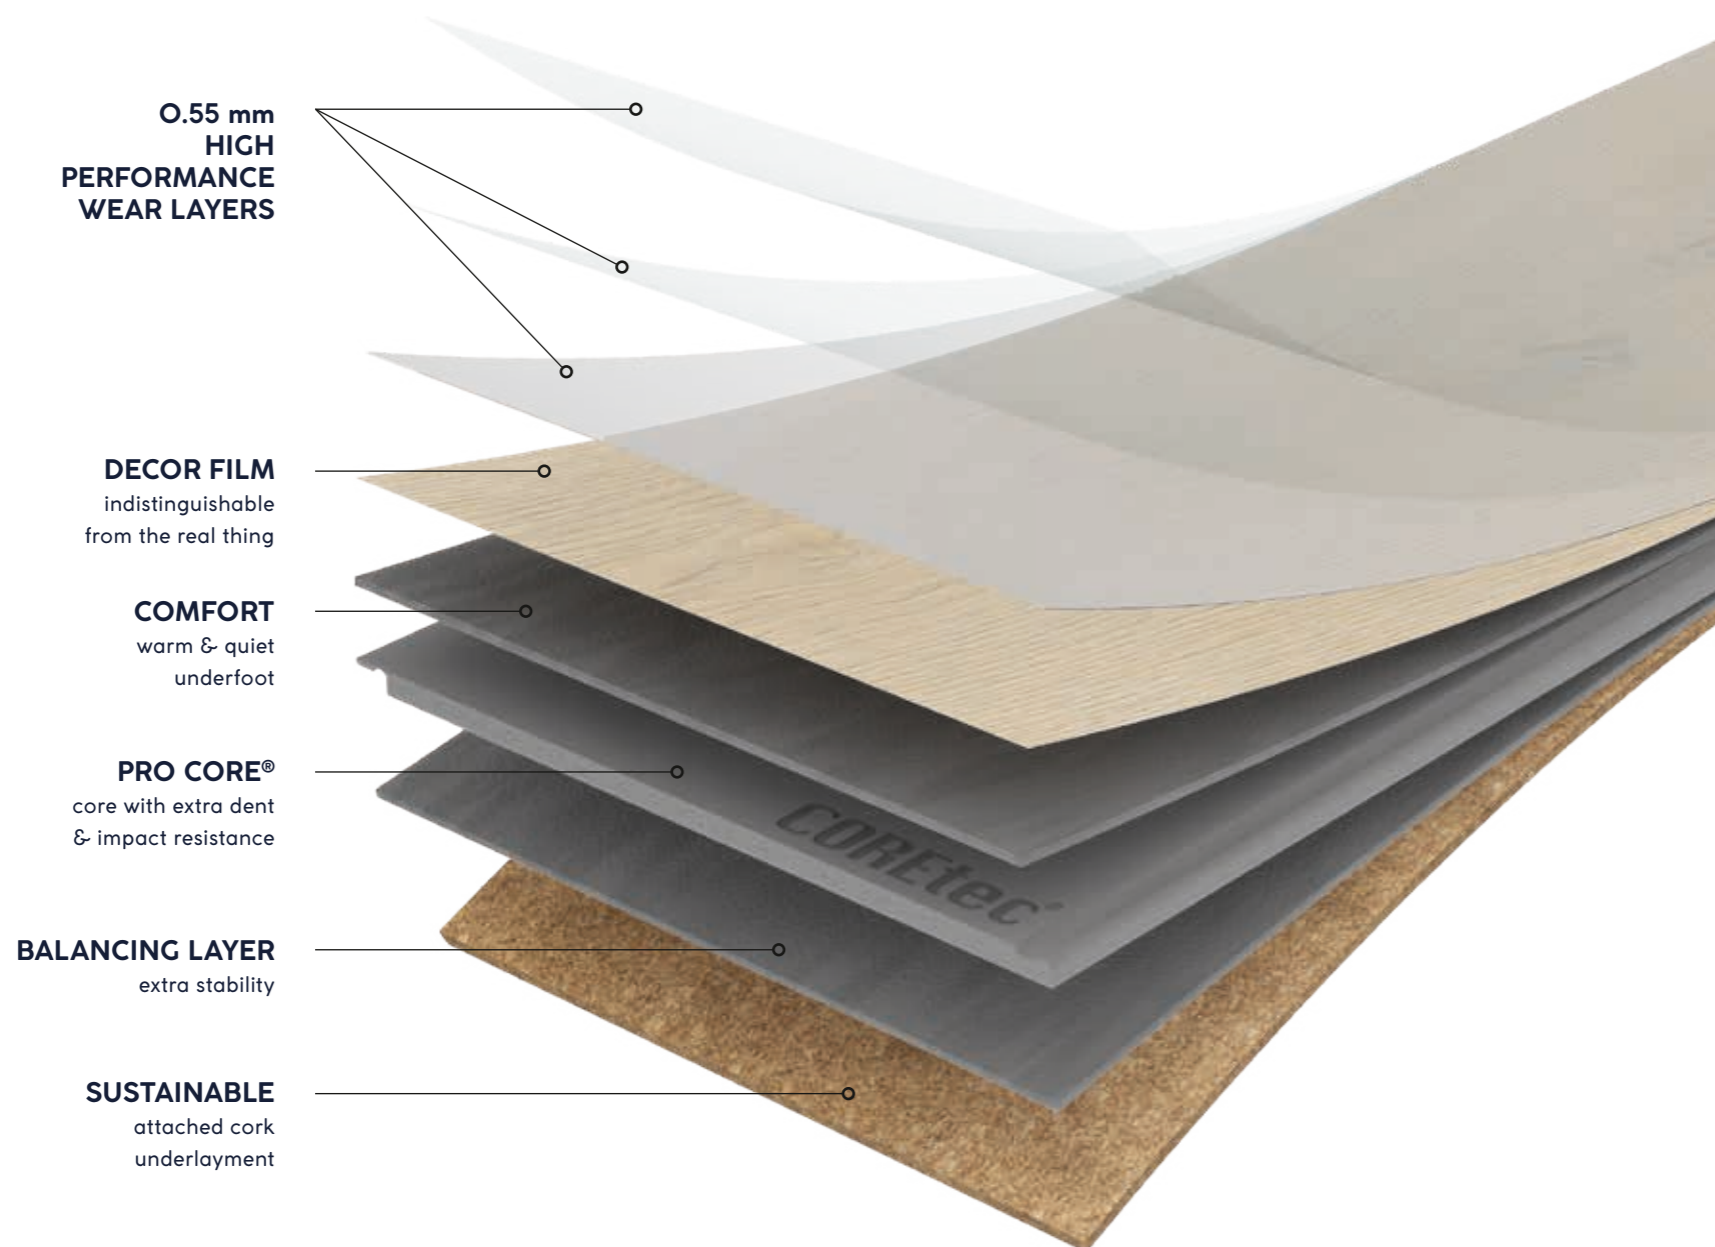

## 100% waterproof

100% vedenpitävä - 100% Vattentåligt - 100% Vanntett - 100% vandfast



## Extremely stable

Erittäin vakaa - Dimensionsstabil - Ekstrem stabil - Ekstremt stabilt



## No acclimatisation necessary

Akklimatisointia ei tarvita - Utan akklimering - Ingen akklimering nødvendig - Skal ikke akklimeres



## Easy to install

Helppo asentaa - Enkelt att installera - Lett og legge - Let at installere



## Installation on any surface

Asennus mille tahansa pinnalle - Alla typer av underlag - Kan innstales over alle typer overflate - Monteres på enhver overflate



## Reduces noise

Vähentää melua - Minskar ljud - Reduserer støy - Dæmper støj



## Wear resistant

Kulutusta kestävä - Slitstyrka - Slitesterk - Slidstærk



## Pet proof

Lemmikkieläinten kestävä - Husdjurssäkert - Kjøledyr styrke - Velegnet til kœledyr



## Electrostatic performance

Sähköstaattinen suorituskyky - Mot statisk elektrisitet - Elektrostatisk ytelse - Antistatisk



## Ideal for underfloor heating & cooling

Ihanteellinen lattialämmitykselle ja -jäähdytykselle - Lämpligt för värmegolv - Ideal for gulvvarme - Ideal for gulvvarme og gulvkøling

# Floors for high demands

ProPlus doesn't need intricate designs to make a statement. Its minimalist aesthetic has a unique charm of its own and directs attention to what truly matters: its exceptional durability.

Where style meets strength



**PRO-PLUS**

<p><b>1200 MB</b></p> <p>1220 x 183 mm</p> <p> 5,00 mm</p> <p> 0,55 mm</p> <p> 12 pcs 2,68 m<sup>2</sup> ± 22 kg</p>		<p><b>1500 4V</b></p> <p>1520 x 183 mm</p> <p> 5,00 mm</p> <p> 0,55 mm</p> <p> 10 pcs 2,78 m<sup>2</sup> ± 23 kg</p>
<p><b>TILE 4V</b></p> <p>610 x 472 mm</p> <p> 5,00 mm</p> <p> 0,55 mm</p> <p> 10 pcs 2,88 m<sup>2</sup> ± 24 kg</p>	<p><b>1200 MB E</b></p> <p>1220 x 183 mm</p> <p> 5,00 mm</p> <p> 0,55 mm</p> <p> 12 pcs 2,68 m<sup>2</sup> ± 22 kg</p>	





1200 MB

### COMCAST

50 RLV 1201  
1220 x 183 x 5 mm




1200 MB

### ORIENTAL

50 RLV 1202  
1220 x 183 x 5 mm



IMPERIAL  
50 RLV 1207

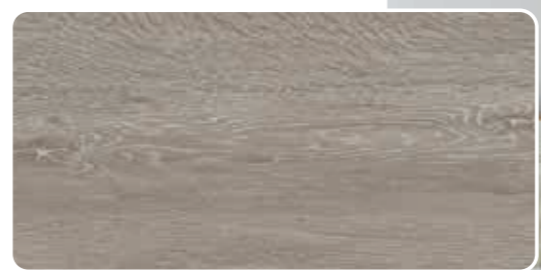

1200 MB

### KRONOS

50 RLV 1203  
1220 x 183 x 5 mm





1200 MB

### CENTURY

50 RLV 1204  
1220 x 183 x 5 mm



1200 MB

### BELLAGIO

50 RLV 1220  
1220 x 183 x 5 mm



1200 MB

### IMPERIAL

50 RLV 1207  
1220 x 183 x 5 mm





MULTICOLOUR EFFECT

1200 MB

### EXCALIBUR

50 RLV 4557  
1220 x 183 x 5 mm



1200 MB

### PALAZZO

50 RLV 4651  
1220 x 183 x 5 mm



1200 MB E

### MANDELAY

50 RLVR 4352  
1220 x 183 x 5 mm






1200 MB E

### VENETIAN

50 RLVR 4356  
1220 x 183 x 5 mm

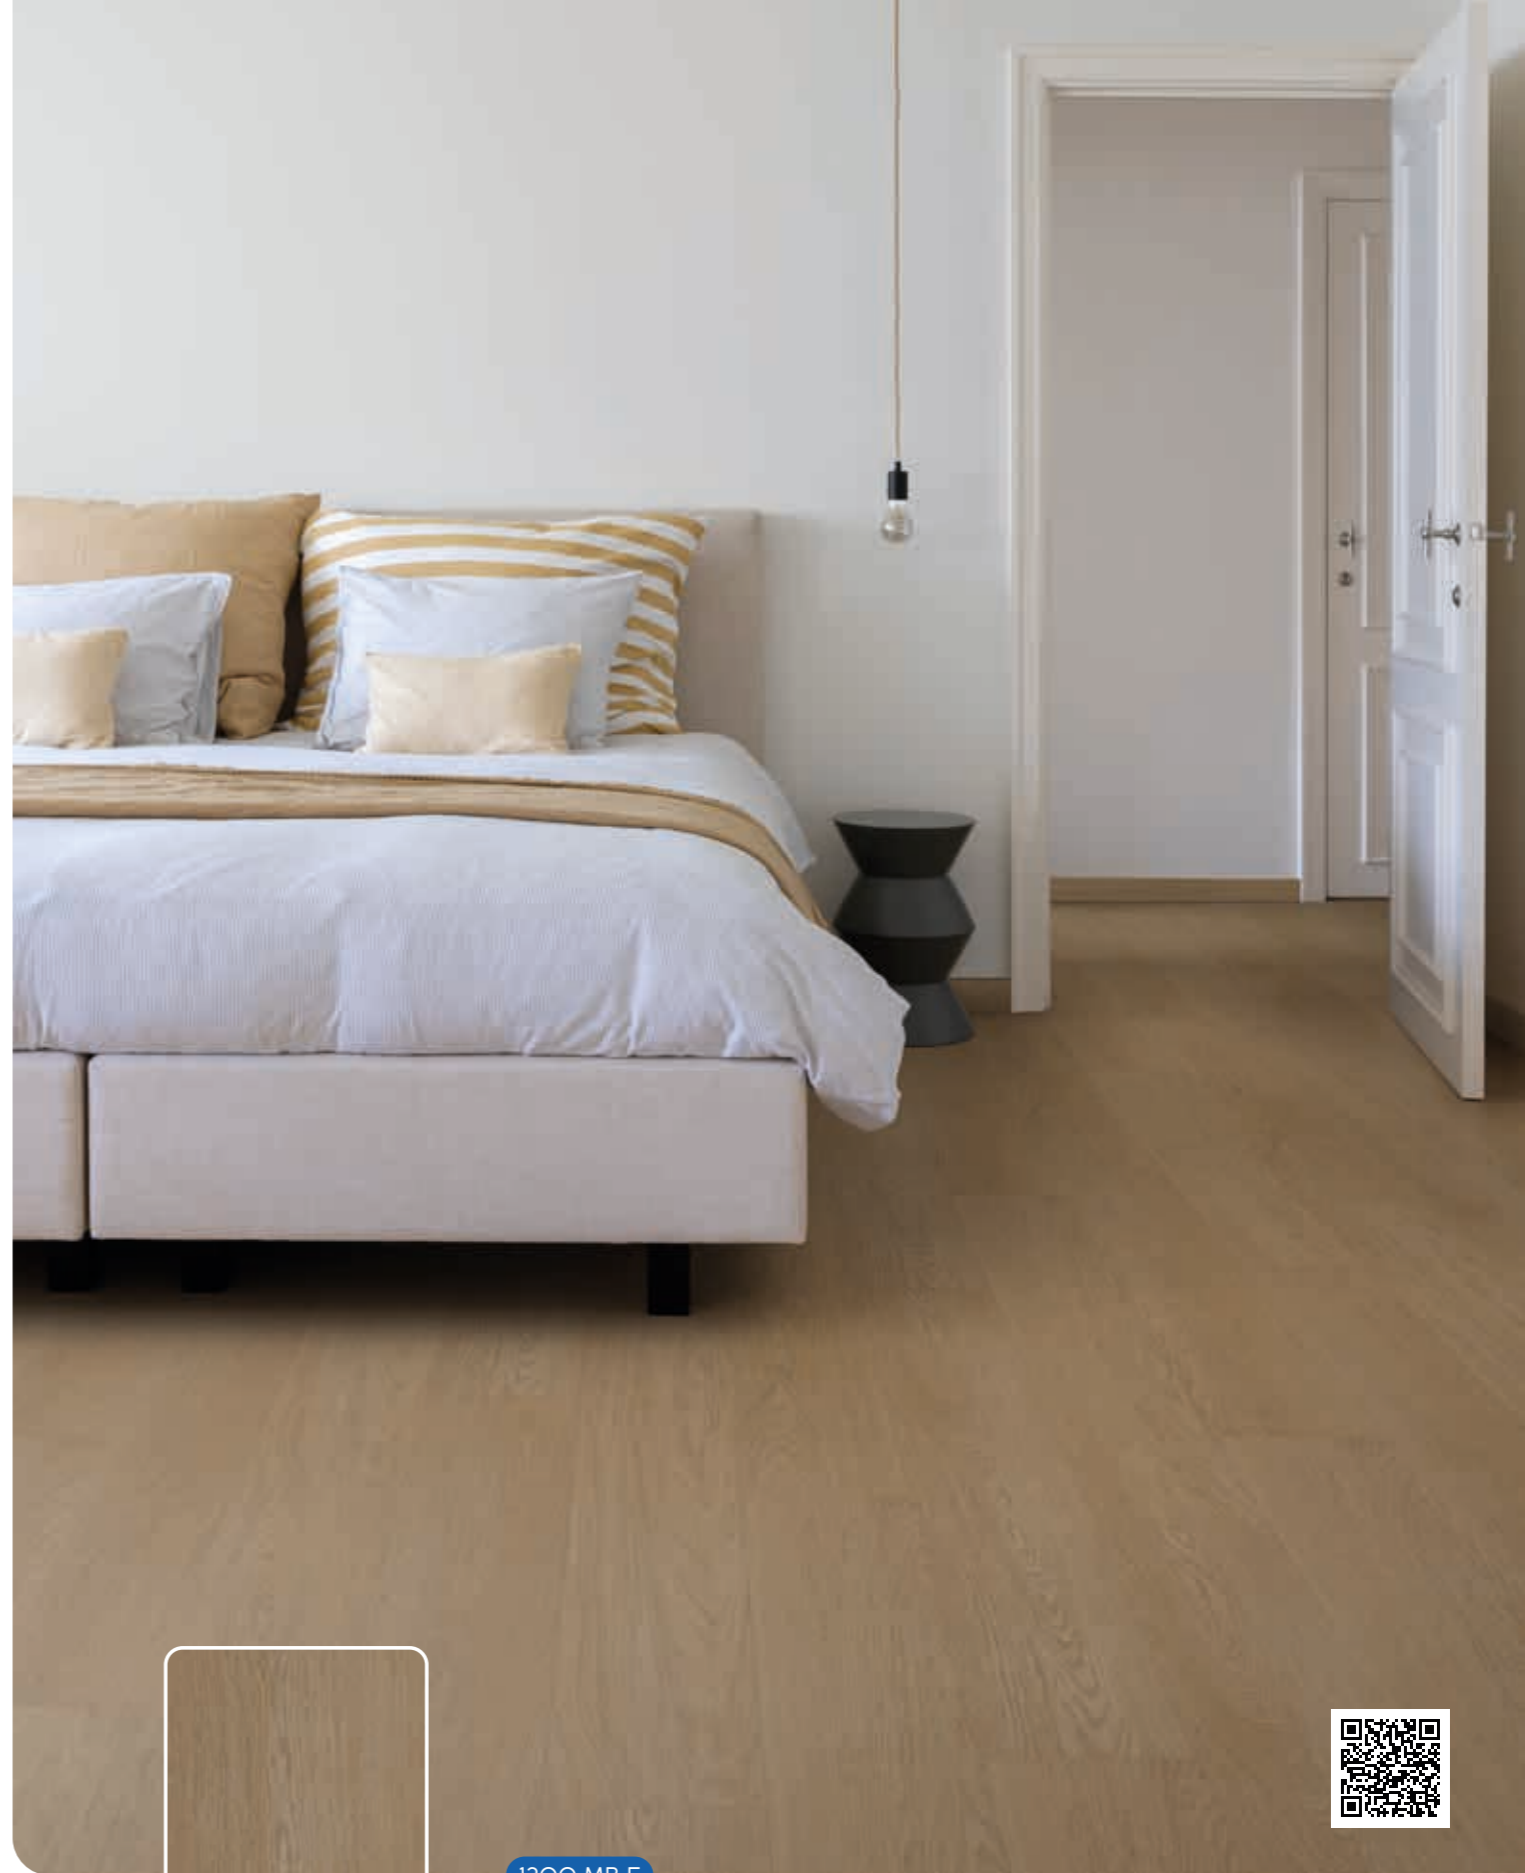

1200 MB E

### RIO

50 RLVR 4455  
1220 x 183 x 5 mm



1200 MB E

### WYNN

50 RLVR 4416  
1220 x 183 x 5 mm







1500 4V

### PIANO

50 RLVE 1213  
1520 x 183 x 5 mm



1500 4V

### METROPOL

50 RLVE 1216  
1520 x 183 x 5 mm



1500 4V

### MIRAGE

50 RLVE 1218  
1520 x 183 x 5 mm





1500 4V

### KINGDOM

50 RLVE 1228  
1520 x 183 x 5 mm



TILE 4V

### CRISTAL


50 RLVE 4191  
610 x 472 x 5 mm




TILE 4V

### STRATOSPHERE

50 RLVE 4193  
610 x 472 x 5 mm

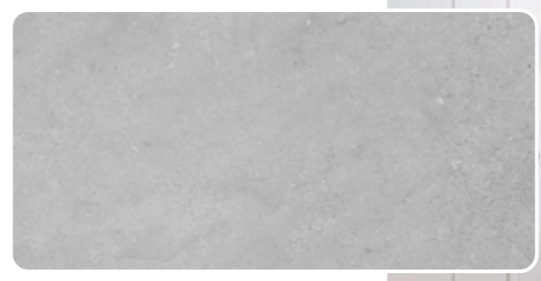


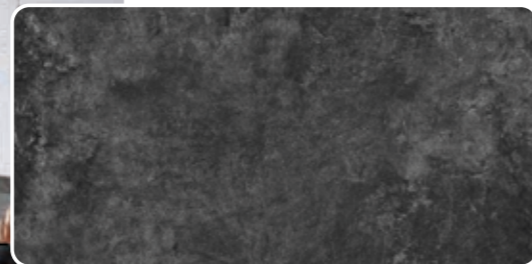

TILE 4V

## MILLENNIUM

50 RLVE 4298  
610 x 472 x 5 mm

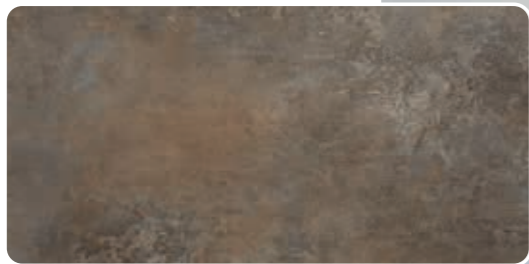

TILE 4V

## TROPICANA

50 RLVE 4767  
610 x 472 x 5 mm




## Accessories

### Paintable skirtings


Our paintable skirtings are 100% waterproof and shock resistant.




CASTLE  
14 cm 1.8 cm 2 m  
70 PSK2000-1




HIGH  
10 cm 1.3 cm 2.3 m  
70 PSK2300-3

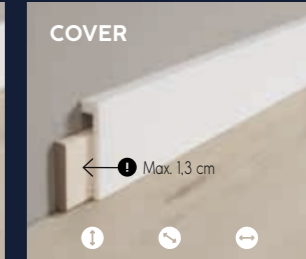

COVER  
10 cm 2 cm 2 m  
70 PSK2000-2



MIDDLE  
6.5 cm 1.3 cm 2.3 m  
70 PSK2300-2



LOW  
4 cm 1 cm 2.3 m  
70 PSK2300-1




Discover all accessories


### Matching design accessories




... = Matching design reference



HIGH MODERN  
8 cm 1.5 cm 2.4 m  
70 HD11 ...

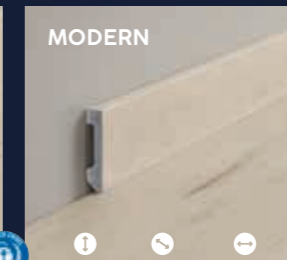


MODERN  
5.8 cm 1.3 cm 2.4 m  
70 MD11 ...




QUARTER ROUND  
1.8 cm 1.8 cm 2.4 m  
70 QR11 ...

### Aluminium profiles


- 2001 Matte black
- 2002 Brushed aluminium
- 2003 Champagne bronze



T-PROFILE  
4-7.5 mm 2.7 cm 2 m  
70 ATP ... PC



REDUCER  
4-7.5 mm 3.4 cm 2 m  
70 ARP ... PC



END PROFILE  
4-7.5 mm 2.1 cm 2 m  
70 AEP ... PC

## Installation

### Easy installation

COREtec® floors have the easiest install on the market.

Watch our installation video on our website [www.coretecfloors.com](http://www.coretecfloors.com), or by scanning the QR code.



## Maintenance

### The COREtec® Clean, quick & green kit:

- Daily cleaner
- Deep cleaner
- Stain remover



80 CCS 3400

# Technical specifications

## LEVEL OF USE

Käyttöluokka / Klassificering  
användningsområde / Bruksklasse /  
Anvendelsesgrad  
Class 23 / 33 (EN ISO 10874)

## GEOMETRICAL CHARACTERISTICS

Geometriset ominaisuudet / Geometrisk  
karakteristik / Geometriske kjennetegn /  
Geometriske egenskaber  
Conform (EN 17539)

## WEAR RESISTANCE

Kulutuksenkesto / Slitstyrka / Slitstyrke /  
Slidstyrke  
Pass 5000 cycles (ISO 24338)

## CASTOR CHAIR RESISTANCE

Pyörällisen toimistotuolin kesto / Tålighet  
mot rullhjul / Motstandsdyktighet /  
Modstandsdygtighed over for hjulstol  
Pass 25000 cycles (ISO 4918)

## EFFECT OF FURNITURE LEG

Huonekalun jalkojen kesto / Verkan från  
möbelben / Effekt møbelben / Virkning  
af møbelben  
No visible change (EN 16581)

## RESIDUAL INDENTATION

Jännöspainuma / Beständighet mot  
intrycksmärken / Motstandsdyktighet mot  
tryckmerker / Resterende indtryk  
≤ 0.10 mm (EN ISO 24343-1)

## RESISTANCE TO STAINING

Tahraantumisenkesto / Fläckbeständighet  
/Motstandsdyktighet mot flekker /  
Modstandsdygtighed over for pletter  
5 (no visible change) (EN 438-2)

## LOCKING STRENGTH

Lukituksen vahvuus / Låsingsstyrka /  
Låsestabilitet / Låsingsstyrke  
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

## DIMENSIONAL STABILITY

Mittavakaus / Dimensionsstabilitet vid värmepåverkan /  
Formstabilitet / Dimensionel stabilitet  
Pass ≤ 0.25% (EN ISO 23999)

## COLOUR FASTNESS TO LIGHT

Valonkesto / Färghärdighet / Lysfasthet /  
Farveægthed over for lys  
> grade 6 (EN ISO 105-B-02)

## IMPACT SOUND REDUCTION

Askeläänen parannusarvo / Ljudisolering / Akustisk  
isolasjon (lydisolering) / Reduktion af stødlyd  
 $\Delta L_w = 17$  dB (ISO 10140-3 / EN 717-2)

## FORMALDEHYDE EMISSION CLASS

Formaldehydilouokka / Formaldehydemission /  
Formaldehyd emisjonsgruppe /  
Formaldehydemissionsklasse  
E1 (EN 717-1)

## FIRE CLASSIFICATION

Paloluokka / Flamsäkerhet / Brannklasse /  
Brandklassificering  
Bfl - S1 (EN 13501)

## SLIP RESISTANCE

Kitka / Halksäkerhet / Sklimotstand / Skridsikkerhed  
DS - RIO (EN 13893 - DIN 51130)

## UNDERFLOOR HEATING



Lattialämmitys / Värmegolv / Gulvvarme / Gulvvarme  
Suitable (see: Underfloor Heating Guidelines)


## ELECTROSTATIC PERFORMANCE

Sähköstaattinen varautuminen / Prestanda statisk  
elektricitet / Elektrostatisk ytelse (antistatisk) /  
Elektrostatisk ydeevne  
≤ 2 kV (EN 1815)

## THERMAL RESISTANCE

Lämmönvastus / Värmemotstånd /  
Varmebestandighet / Termisk modstandsdygtighed  
0.0318 m<sup>2</sup>-K/W (EN 12667)

Series	Name	SO Number	Length (mm)	Width (mm)	Thickness (mm)			Pieces / box	M <sup>2</sup> / box	± Weight box (kg)
1200 MB	Comcast	50 RLV 1201	1220	183	5			12	2.68	22
	Oriental	50 RLV 1202	1220	183	5			12	2.68	22
	Kronos	50 RLV 1203	1220	183	5			12	2.68	22
	Century	50 RLV 1204	1220	183	5			12	2.68	22
	Imperial	50 RLV 1207	1220	183	5			12	2.68	22
	Bellagio	50 RLV 1220	1220	183	5			12	2.68	22
	Excalibur	50 RLV 4557	1220	183	5			12	2.68	22
	Palazzo	50 RLV 4651	1220	183	5			12	2.68	22
1200 MBE	Mandelay	50 RLVR 4352	1220	183	5		•	12	2.68	22
	Venetian	50 RLVR 4356	1220	183	5		•	12	2.68	22
	Wynn	50 RLVR 4416	1220	183	5		•	12	2.68	22
	Rio	50 RLVR 4455	1220	183	5		•	12	2.68	22
1500 4V	Piano	50 RLVE 1213	1520	183	5	•		10	2.78	23
	Metropol	50 RLVE 1216	1220	183	5	•		10	2.78	23
	Mirage	50 RLVE 1218	1520	183	5	•		10	2.78	23
	Kingdom	50 RLVE 1228	1520	183	5	•		10	2.78	23
TILE 4V	Cristal	50 RLVE 4191	610	472	5	•		10	2.88	24
	Stratosphere	50 RLVE 4193	610	472	5	•		10	2.88	24
	Millennium	50 RLVE 4298	610	472	5	•		10	2.88	24
	Tropicana	50 RLVE 4767	610	472	5	•		10	2.88	24

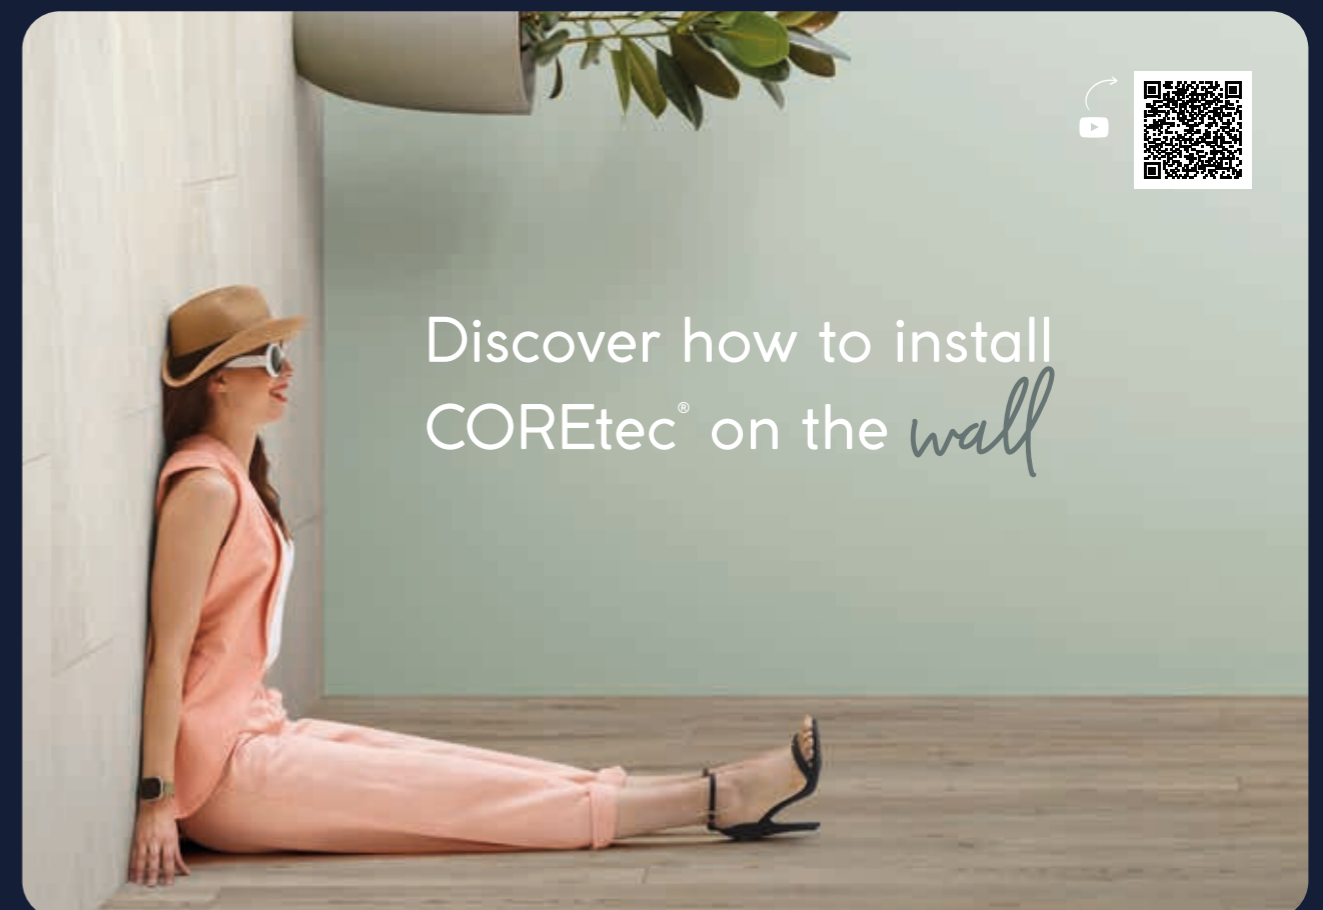

# It's in our *cove* to adore nature




## Our commitments

-  **Choose me once, love me for life**  
We believe in a world where things last! For a lifetime, and longer. That's good for you, and also for the planet. So our products carry a lifetime guarantee for domestic use, and a 10-year guarantee for commercial use.
-  **Breathe healthy air**  
The GreenGuard Gold certification is recognised as one of the most stringent in the world, going beyond the A+ rating for indoor air quality. This means that your floor contributes to the healthiest environment for working and living, and protects the most sensitive people.
-  **Sustainable cork underlay**  
Cork is a highly durable material. It retains its natural springiness even after years of use, while woods planted with cork oak reduce CO<sub>2</sub> emissions.
-  **We can prove it**  
Don't take our word for it, look at the proof! COREtec® meets the standards for numerous quality labels and certificates. Our floors are free of heavy metals (such as lead) and phthalates.
-  **Second Life**  
So you're changing your floor? Why not give the old COREtec® floor a second life! You can gift your old floor via Second Life Floors. Because your old floor is perfectly fine to start a new story in a new location.
-  **Do your bit for forest conservation**  
There is no wood in a COREtec® floor. So no trees are cut down to make your home beautiful. More than that: we are active in forest conservation, worldwide.



COREtec® floors are  
**that good, somebody else**  
can re-*enjoy* it.

Learn how your COREtec® floor gets a second life.

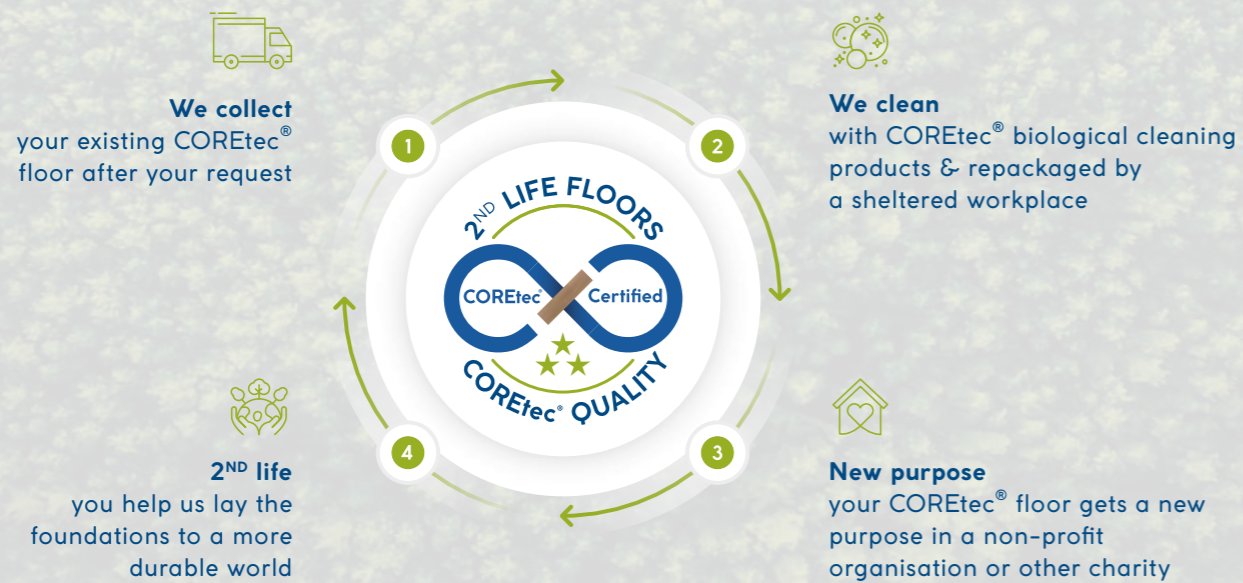

COREtec®, the natural choice



Warranty (Years) The warranty covers manufacturing defects and premature wear in the event of normal use.  
 Takuu (vuosi) Takuu kattaa valmistusvirheet ja normaalista käytöstä johtuvan pinnan puhkikumisen.  
 Garanti (år) Garantien gælder for produktionsfejle og for tidlig udtilning ved normalt anvendelse.  
 Garanti (år) Garantien gjelder mot produksjonsfeil, og for tidlig slitasje ved normalt bruk av gulvet.  
 Garanti (år) Garantien gælder for fabrikationsfejl og for tidlig slid ved normal brug.

**COREtec**<sup>®</sup>  
FLOORS



Souverainestraat 27 - 9770 Kruisem (Belgium)  
info@usfloors.be · www.coretecfloors.com